



[industries3r.com](http://industries3r.com)

**Danville office**

Industries 3R inc.  
55, Road 116 West  
Danville (Quebec)  
Canada J0A 1A0

Telephone: (819) 839-2793  
Fax: (819) 839-2797  
Toll-free: (800) 567-2728  
Email: [info@industries3r.com](mailto:info@industries3r.com)

**Montreal office**


Industries 3R inc.  
1479, Begin street  
Ville St-Laurent (Quebec)  
Canada H4R 1V8

Telephone: (514) 333-3971  
Fax: (514) 333-7224  
Email: [info@industries3r.com](mailto:info@industries3r.com)

# 3R815LC

## RUBBER

The 3R815LC offers similar specifications found in the top quality 3R815 neoprene rubber. It can be used in many applications where less particularities are required. It is provided in three different durometers.

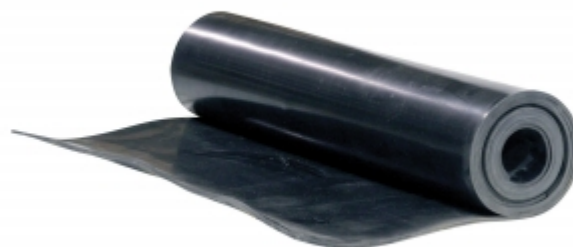

## APPLICATIONS

This material can be used as flange gasketing and as static joints. It is also used in applications where the material is in contact with harsh atmospheric conditions.

## SPECIFICATIONS

### Technical Data

<b>Polymer Type</b>	<b>CR/SBR/NBR</b>
<b>Color</b>	<b>Black</b>
<b>Hardness (Shore A) ± 5</b>	<b>60</b>
<b>Temperature</b>	<b>-25°C to 85°C (-10°F to 185°F)</b>
<b>Tensile Strength, lbs/in<sup>2</sup></b>	<b>600</b>
<b>Elongation minimum, %</b>	<b>300</b>
<b>Compression Set</b>	<b>Good</b>
<b>Abrasion Resistance</b>	<b>Good</b>
<b>Tear Resistance</b>	<b>Good</b>
<b>Ozone Resistance</b>	<b>Fair</b>
<b>Impermeability to Gases</b>	<b>Fair to Good</b>
<b>Resistance to Dilute Acid</b>	<b>Fair</b>
<b>Résistance to aromatic hydro-carbons</b>	<b>Fair</b>
<b>Heat Aging</b>	<b>Fair</b>

---

---

**N.B.** The information, details and values indicated are to the best of our knowledge. We recommend to conduct tests according to local conditions. The data is subject to some variations without notice.