



industries3r.com

Danville office

Industries 3R inc.
55, Road 116 West
Danville (Quebec)
Canada J0A 1A0

Telephone: (819) 839-2793
Fax: (819) 839-2797
Toll-free: (800) 567-2728
Email: info@industries3r.com

Montreal office


Industries 3R inc.
1479, Begin street
Ville St-Laurent (Quebec)
Canada H4R 1V8

Telephone: (514) 333-3971
Fax: (514) 333-7224
Email: info@industries3r.com

3R8200

TEALON

The 3R8200 is produced from virgin PTFE resin filled with micro spheres of silica. This unique process of fabrication provides the Tealon® a high level of fibrillation to overcome the creep relaxation and cold flow problems associated with mechanical grade (3R810) and virgin grade (3R812) PTFE sheets.

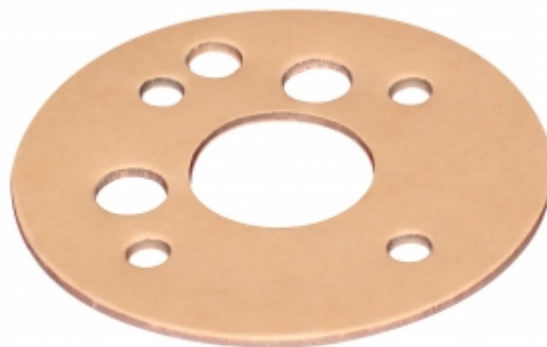

APPLICATIONS

It is suitable for services with high pressures and temperatures, especially in chemical processing and hydrocarbon plants in strong acids (except hydrofluoric), solvents, hydrocarbons, water, steam and chlorine.

SPECIFICATIONS

Technical Data

Sheet size	62" x 62"
Thickness	1/16" and 1/8"
Color	Fawn
PH	0 - 14

Physical properties

Max Pressure	1200 psi (83 bar)
Temperature	-210°C to 260°C (-350°F to 500°F)
P x T max = psi x°F (bar x °C)	350 000 (12 000) 1/16" 250 000 (8 600) 1/8"
Compressibility Range @ 5000 psi (%)	
ASTM F 36 A	7-12
Recovery @ 5000 psi (%)	

ASTM F 36 A	40
Creep Relaxation (%)	
ASTM F 38	18
Specific Gravity (g/cm³)	
ASTM D 792	2.10
Tensile strength (Mpa)	
ASTM 152	14
Sealability (ml/h @ .7 bar)	
ASTM F 37 A	0.2
Sealability (cm³/min)	
DIN 3535	<0.015

N.B. The information, details and values indicated are to the best of our know ledge. We recommend to conduct tests according to local conditions. The data is subject to some variations w ithout notice.