



industries3r.com

Danville office

Industries 3R inc.
55, Road 116 West
Danville (Quebec)
Canada J0A 1A0

Telephone: (819) 839-2793
Fax: (819) 839-2797
Toll-free: (800) 567-2728
Email: info@industries3r.com

Montreal office


Industries 3R inc.
1479, Begin street
Ville St-Laurent (Quebec)
Canada H4R 1V8

Telephone: (514) 333-3971
Fax: (514) 333-7224
Email: info@industries3r.com

TXP407

NEOPRENE COATED FIBERGLASS

This fabric is coated with neoprene on both sides. Flexible, it offers a good resistance to flex cracking, to oils, to grease, to liquid and vapor acids, but is not gas permeable.

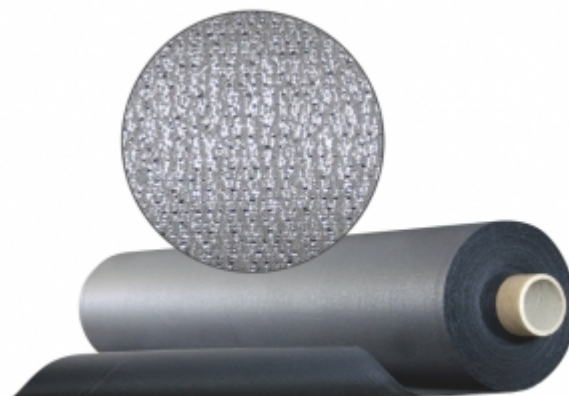

APPLICATIONS

The TXP407 is often used in the fabrication of welding screens due to its good resistance to sparks and splash. It is also recommended for flexible connectors, expansion joints and protective boots for cylinders.

SPECIFICATIONS

Technical Data

Weight (ASTM-D-3776) (oz/sy²)	30
Thickness (ASTM D-1777)	0.024"
Tensile strenght (ASTM D-5587)	Warp : 475 lbs Fill: 375 lbs
Tear strength (ASTM D-5587)	Warp : 25 lbs Fill: 20 lbs
Temperature	120 °C (250 °F)

N.B. The information, details and values indicated are to the best of our know ledge. We recommend to conduct tests according to local conditions. The data is subject to some variations without notice.