



[industries3r.com](http://industries3r.com)

**Danville office**

Industries 3R inc.  
55, Road 116 West  
Danville (Quebec)  
Canada J0A 1A0

Telephone: (819) 839-2793  
Fax: (819) 839-2797  
Toll-free: (800) 567-2728  
Email: [info@industries3r.com](mailto:info@industries3r.com)

**Montreal office**


Industries 3R inc.  
1479, Begin street  
Ville St-Laurent (Quebec)  
Canada H4R 1V8

Telephone: (514) 333-3971  
Fax: (514) 333-7224  
Email: [info@industries3r.com](mailto:info@industries3r.com)

# TXP507

## TEFLON COATED FIBERGLASS

The TXP507 is a fiberglass fabric coated with a PTFE resin on both sides. It resists weather changes, chemical products and abrasion. It is easily sewn and its flexibility allows for making more complex shapes. It has low flammability properties, is easily cleaned and emits minimal smoke.

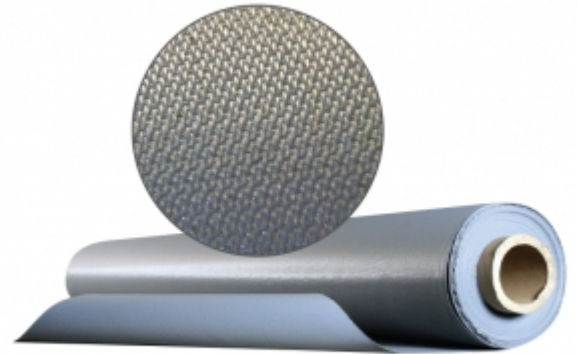

### APPLICATIONS

- Removable insulation blankets
- Protective sleeves for valves, pumps, flanges
- Protection against frost
- Protection against chemicals

### SPECIFICATIONS

#### Technical Data

<b>Temperature</b>	<b>-101°C to 315°C (-150°F to 600°F)</b>
<b>Weight</b>	<b>18oz/yd<sup>2</sup></b>
<b>Thickness</b>	<b>0.018"</b>
<b>Tensile strength (ASTM D5034)</b>	<b>Warp: 410 lbs/in, Fill: 350 lbs/in</b>
<b>Mullen burst (ASTM D3786)</b>	<b>650psi</b>
<b>Flame resistance</b>	<b>Char length: 1 in max., Flameout: 1 sec. max.</b>
<b>Width</b>	<b>60"</b>
<b>Length</b>	<b>50 yd/roll</b>

**N.B.** The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.

