

**industries3r.com****Danville office**

Industries 3R inc.  
55, Road 116 West  
Danville (Quebec)  
Canada J0A 1A0

Telephone: (819) 839-2793  
Fax: (819) 839-2797  
Toll-free: (800) 567-2728  
Email: [info@industries3r.com](mailto:info@industries3r.com)

**Montreal office**


Industries 3R inc.  
1479, Begin street  
Ville St-Laurent (Quebec)  
Canada H4R 1V8

Telephone: (514) 333-3971  
Fax: (514) 333-7224  
Email: [info@industries3r.com](mailto:info@industries3r.com)

## 3R856

### RUBBER

3R856 is a Viton® grade A rubber with good resistance to chemicals such as oils, fuels, lubricants and most mineral oils. It withstands operating temperatures over 200°C (400°F). It can also be easily used outdoors because it is resistant to bad weather, atmospheric oxidation, UV rays, ozone, fungi and mold.

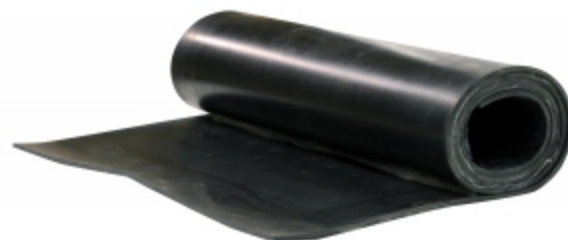

## APPLICATIONS

The composition of 3R856 ensures a very good seal in aggressive environments. For example, it is ideal for the manufacture of seals in applications in the presence of petroleum products.

## SPECIFICATIONS

### Technical Data

<b>Polymer</b>	<b>FKM</b>
<b>Color</b>	<b>Black</b>
<b>Hardness (Shore A) ± 5</b>	<b>75</b>
<b>Temperature</b>	<b>-28°C à 232°C (-20°F à 450°F)</b>
<b>Tensile Strength</b>	<b>1200psi</b>
<b>Elongation</b>	<b>165% min.</b>

**N.B.** The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.