



industries3r.com

#### Danville office

Industries 3R inc.  
55, Road 116 West  
Danville (Quebec)  
Canada J0A 1A0

Telephone: (819) 839-2793  
Fax: (819) 839-2797  
Toll-free: (800) 567-2728  
Email: info@industries3r.com

#### Montreal office


Industries 3R inc.  
1479, Begin street  
Ville St-Laurent (Quebec)  
Canada H4R 1V8

Telephone: (514) 333-3971  
Fax: (514) 333-7224  
Email: info@industries3r.com

## 3R870

### COMPRESSED SHEET

Compressed non-asbestos sheet gasket material produced from a combination of aramid fiber, inorganic fillers and bonded with styrene-butadiene rubber (SBR). It is a high quality sheet for general service with excellent sealing properties. Even if it compressed this sheet stays stable.

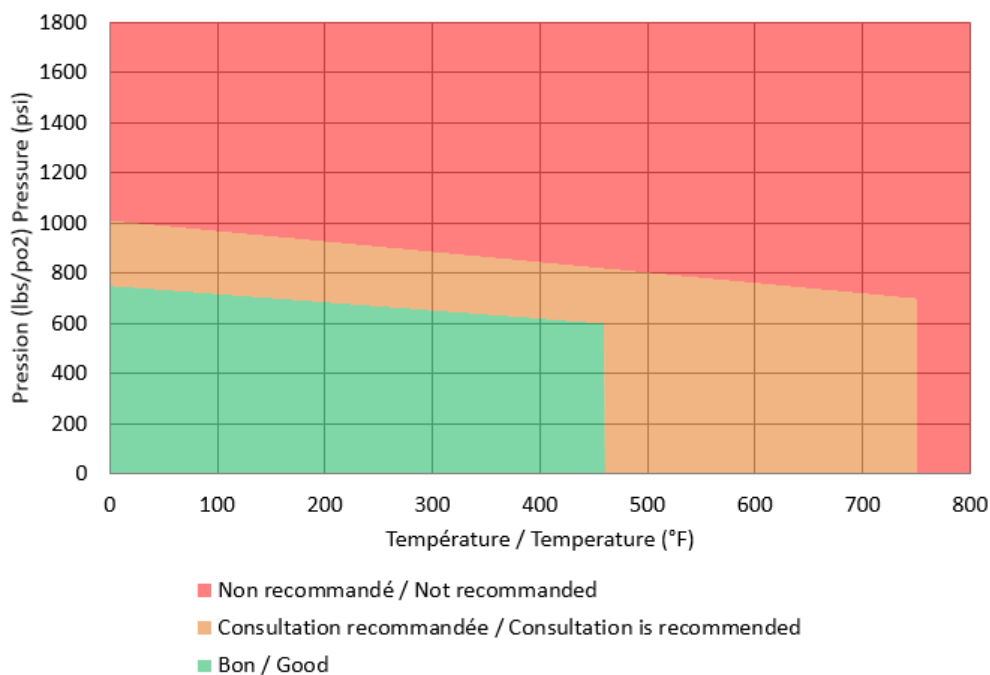

## APPLICATIONS

The 3R 870 has numerous applications in the process industries handling media like:

- Mild acids and alkali
- General chemicals
- Industrial gases
- Brine
- Water
- Neutral solutions

- Air
- Saturated steam

SPECIFICATIONS

Technical Data

Color	Off White
Temperature Limits	
Maximum	380°C (715°F)
Continuous Max	270°C (518°F)
Pressure	
Maximum	1015 psi (70 bar)
Pressure	
Continuous	725 psi (50 bar)
Available Sheet Thickness	1/64" to 1/8"
Physical Properties	
Density	112 lb/ft³ (1.80 g/cm)
Compressibility (ASTM F36)	7J-17%
Recovery (ASTM F36)	min 50%
Ignition Loss (ASTM F495)	max 27%
Thickness increase after 5 hour immersion (ASTM F146)	
• ASTM IRM 903 @ 300°F (150°C)	max 40%
• ASTM Fuel B @ 77°F (25°C)	max 20%
Weight increase after 5 hour immersion (ASTM F146)	
• ASTM IRM 903 @ 300°F (150°C)	max 30%
• ASTM Fuel B @ 77°F (25°C)	max 30%
Torque retention (DIN 52913)	32 Mpa

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.