



industries3r.com

Danville office

Industries 3R inc.
55, Road 116 West
Danville (Quebec)
Canada J0A 1A0

Telephone: (819) 839-2793
Fax: (819) 839-2797
Toll-free: (800) 567-2728
Email: info@industries3r.com

Montreal office


Industries 3R inc.
1479, Begin street
Ville St-Laurent (Quebec)
Canada H4R 1V8

Telephone: (514) 333-3971
Fax: (514) 333-7224
Email: info@industries3r.com

C24

PTFE

The C-27 sealing tape is made of pure PTFE particules. It is moldable, dry and non-hardening.

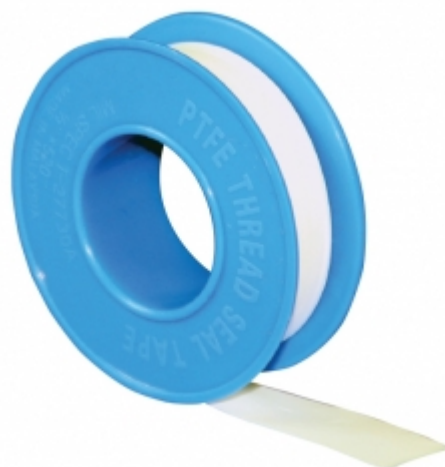

APPLICATIONS

Easy to install, it penetrates in the treading during manual tightening and does not tear when the threads are screwed. This efficient tape can be easily applied to all metal or plastic pipes. It remains flexible to resist vibration and permits easy disassembly of connections when required.

SPECIFICATIONS

Technical Data

Temperature	-260°C to 310°C (-435°F to 590°F)
Pressure (psi)	2 900
pH	0-14
Density (lbs/ft ³)	39
Elongation (%)	120
Thickness	0.003"
Widths	1/4", 1/2", 3/4", 1"
Length per roll	520"

N.B. The information, details and values indicated are to the best of our know ledge. We recommend to conduct tests according to local conditions. The data is subject to some variations without notice.

