


industries3r.com
Danville office

Industries 3R inc.
55, Road 116 West
Danville (Quebec)
Canada J0A 1A0

Telephone: (819) 839-2793
Fax: (819) 839-2797
Toll-free: (800) 567-2728
Email: info@industries3r.com

Montreal office


Industries 3R inc.
1479, Begin street
Ville St-Laurent (Quebec)
Canada H4R 1V8

Telephone: (514) 333-3971
Fax: (514) 333-7224
Email: info@industries3r.com

TXP1106GA

GRAPHITE FIBERGLASS

Heavyweight woven textured fiberglass fabric coated with a specially formulated graphite and polyurethane solution that gives it high temperature and abrasion resistance properties in environments.

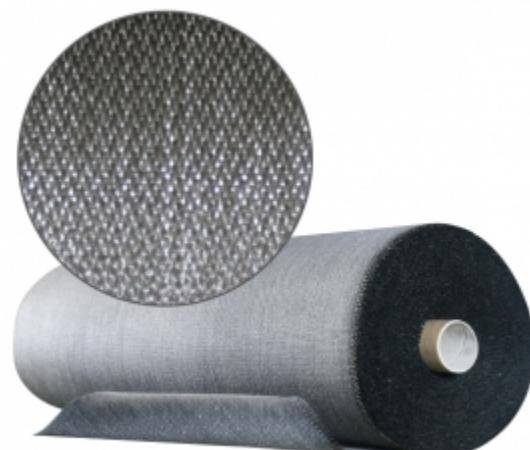

APPLICATIONS

TXP1106GA is recommended for the manufacture of seals, flexible expansion joints, removable ducts, and other types of fire control systems. This material is flexible, malleable, and easy to sew.

SPECIFICATIONS

Technical Data

Base fabric	
Weave	Plain
Construction (ASTM D3775-96)	Warp: 15 ends/inch (6 ends/cm) Weft: 12 picks/inch (5 picks/cm)
Weight (ASTM D3776-96)	30 oz/yd ² (1020 g/m ²)
Thickness (ASTM D1777-96)	0.047" (1.2 mm)
Coated fabric	
Coating	Graphite and polyurethane solution both sides
Weight (ASTM 3776-96)	32.4 oz/yd ² (1100 g/m ²)
Thickness (ASTM D1777-96)	0.047" (1.2 mm)
Color	Black
Temperature resistance	1200°F (600°C)

N.B. The information presented may differ from practice. We recommend conducting tests according to the conditions of use. We accept no responsibility for results obtained by the application of this information or the safety and suitability of our products. The data is subject to certain variations without notice.