



industries3r.com

Danville office

Industries 3R inc.
55, Road 116 West
Danville (Quebec)
Canada J0A 1A0

Telephone: (819) 839-2793
Fax: (819) 839-2797
Toll-free: (800) 567-2728
Email: info@industries3r.com

Montreal office


Industries 3R inc.
1479, Begin street
Ville St-Laurent (Quebec)
Canada H4R 1V8

Telephone: (514) 333-3971
Fax: (514) 333-7224
Email: info@industries3r.com

TXP428

WELDING BLANKET FABRIC - ACRYLIC COATED FIBERGLASS

The TXP428, yellow and coated with a fire retardant acrylic, is non-combustible and resists sparks, projections and abrasion. This fabric is lock stitched with heat resistant fiberglass thread.

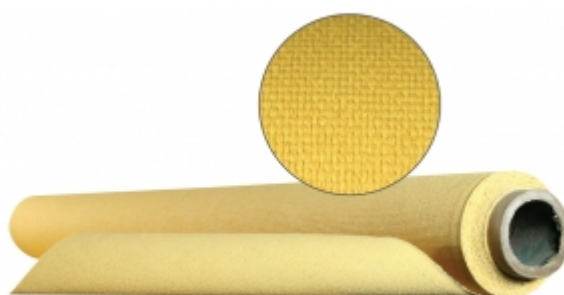

APPLICATIONS

The TXP428 is recommended for the manufacture of vertical welding curtains to contain sparks, spatter and heat. It is available in two densities: 24 and 35 oz. It withstands high temperatures up to 1000 ° F.

SPECIFICATIONS

Technical Data

Weight (oz/yd ²)	24 or 35
Thickness	0,022" (0,56 cm) or 0,036" (0,91 cm)
Continuous Temperature	538°C (1000°F)

N.B. The information, details and values indicated are to the best of our knowledge. We recommend to conduct tests according to local conditions. The data is subject to some variations without notice.